


Ade® bands: Adealu, Adeplomb, Adecuivre

- Self-adhesive elastomeric bitumen metal surfaced strips



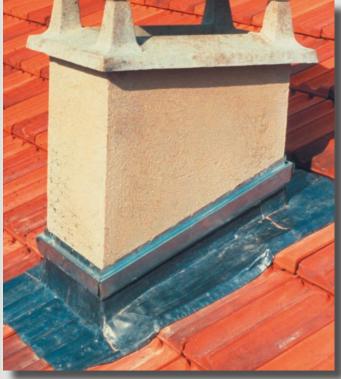

Adhesive: easy to install

Wide choice of surfacing and colours

Harmonization and adaptation of decor

Packaging			
	Length	Width	Weight
Adealu band	10 m	0,10 - 0,15 - 0,20 - 0,30 0,60 - 1,00 m	13,5 kg/m²
Adecuivre band	10 m	0,10 - 0,20 - 0,30 m	15 kg/m ²
Adeplomb band	3 m	0,16 - 0,20 - 0,25 - 0,33 0,50 - 1,00 m	15 kg/m²

Application

Adealu band

Quick works, finishing of details, roofing repairs, waterproofing of roofs or facades.

Adecuivre band

Roofing accessories, cleated roofing: all kinds of connection works in copper foil.

Adeplomb band

Connection works, roofing accessories:

- forming and carving facilitated by the malleability and ductility of the product;
- no fastenings nor welds;
- no chemical or galvanic corrosion.



Description

Adealu band

- Self-adhesive waterproofing strip surfaced with aluminium-composite foil;
- aluminium-composite foil thickness: 0,5 mm;
- total thickness: 1,1 mm;
- 3 colours: Natural (n° 1), Slate Grey (n° 2), Terracotta (n° 4);
- applications: 36789

Adecuivre band

- Self-adhesive waterproofing strip surfaced with copper foil;
- copper foil thickness: 70 microns;
- total thickness: 1,1 mm;
- applications: 1236789

Adeplomb band

- Self-adhesive waterproofing strip surfaced with lead foil;
- lead foil thickness: 0,7 mm;
- total thickness: 2,7 mm;
- applications: 12345789

Security

Ade® bands are not rated dangerous (for the applications described in this document).

Adeplomb band contains lead and is subject of a safety data sheet, published by Siplast-Icopal accordance with the decree of 28 March 1987. To obtain the document, contact Siplast-Icopal.

Accessories

Adeprimaire or Siplast Primer.

This document is only a guide. Siplast-Icopal reserves the right to change the composition and fixing recommendations of products as a result of evolution of knowledge and technology.

